


# 2.0mm Pin Header, Dual Row, SMT

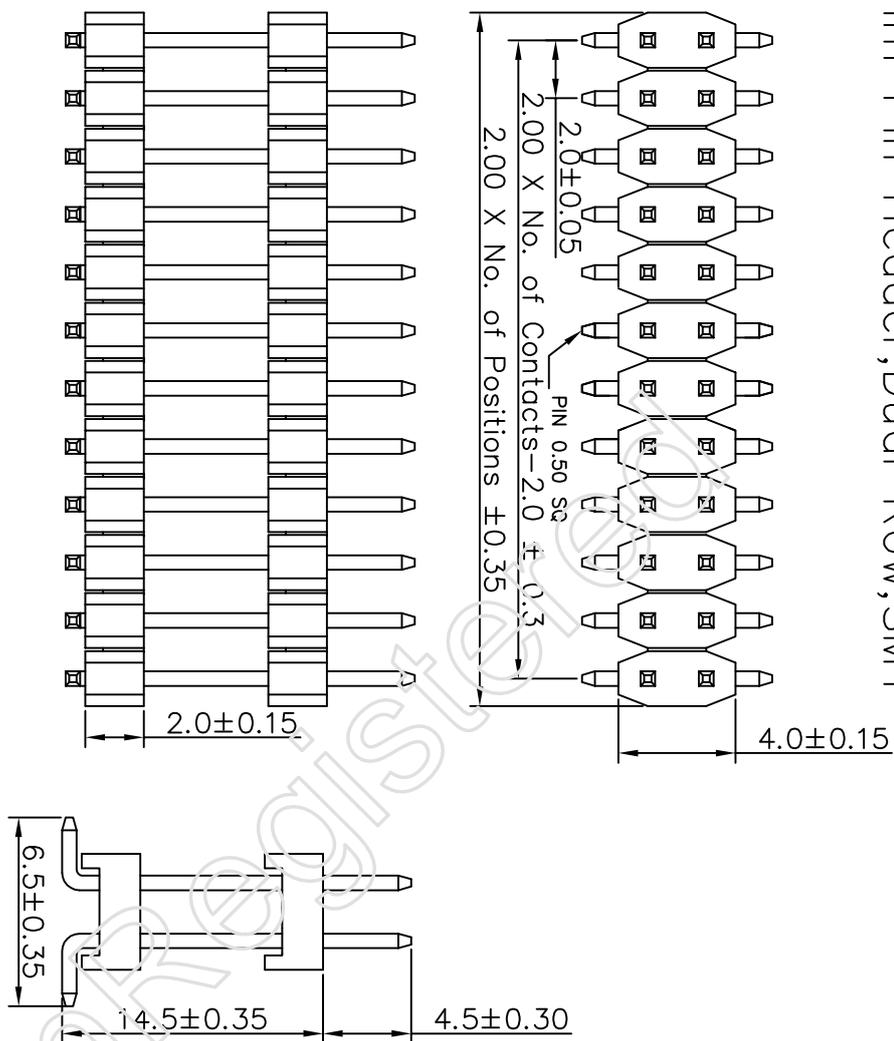

## SPECIFICATIONS

Current Rating : 1.5AMP  
 Operation Temperature: -40° C to +105° C  
 Contact Resistance : 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage : AC 500V

PART NO. 2PH-2150-P□□

□表示PIN脚排数 2-40

REV/ECN NO OR DESCRIPTION	REVISED	DATE

B	CONTACT	4-80	BRASS	Au or Sn over 50U" Ni
A	HOUSING	1	POLYESTER (UL94V-0) LCP	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
3G ENTERPRISE LIMITED				
DECIMALS:	ANGLES:	TITLE PH2.0 双排双塑 L=21.6/6.5(0)/4.0 SMT		
X : ±0.5		DWN	JACK	PART NO. 2PH-2150-P□□
X.X : ±0.35		CHKD		SCALE:N/A
X.XX : ±0.20		APVD		SIZE: A3
X.XXX: ±0.1				SHEET: 1 OF 1
				REV: A
				CUSTOMER COPY(Y/B)

PCB LAYOUT