
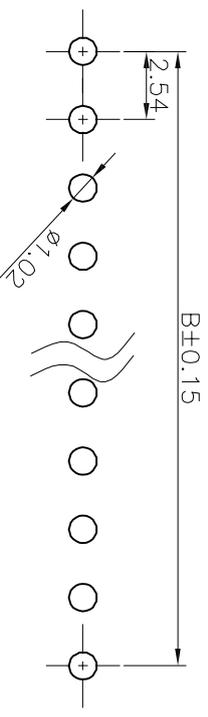
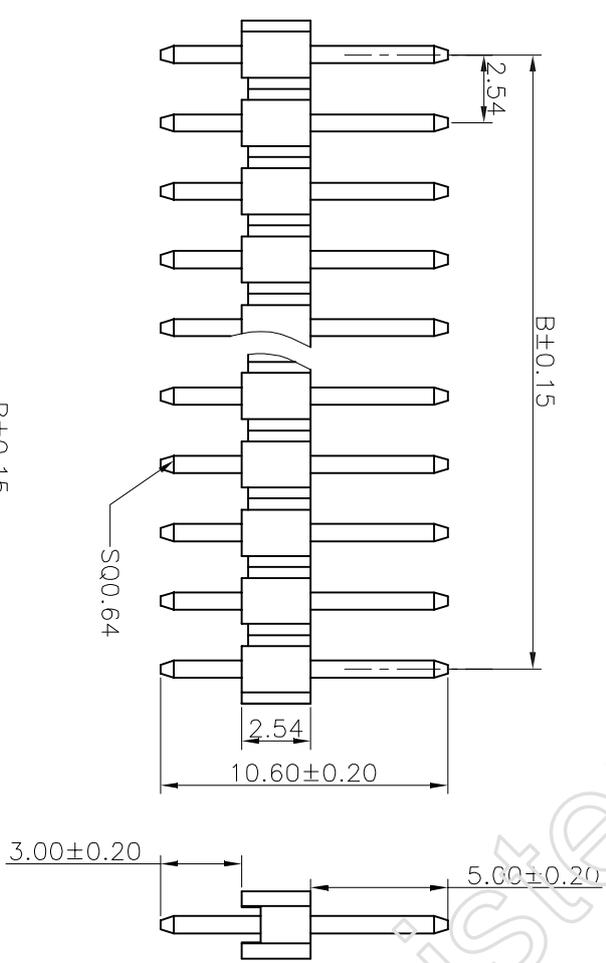


REV.	ECN NO	OR DESCRIPTION	REVISED	DATE

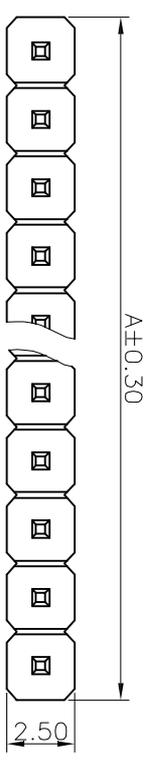

Recommended P.C.B Layout

- 技术要求:**
- 1, 额定电流: 3A
 - 2, 额定电压: 500V 耐电压 1000AC/DC
 - 3, 绝缘电阻: 1000MΩ MIN.at 接触阻抗: 20mΩ MAX
 - 4, 适用温度: -40° C to +105° C.
 - 5, 焊锡温度: 180° C (3-5秒)
 - 6, 塑件表面平整、光洁、无毛刺、气泡, 针表面无氧化、电镀不良等
 - 7, 本产品符合ROHSS环保要求
 - 8, PART NO. 2PH-1060-K口口

表示PIN数: 1-40

Dimensions List

PIN	DIP	A	B	PIN	DIP	A	B
1*01	2.54	0.00	1*21	53.34	50.80		
1*02	5.08	2.54	1*22	55.88	53.34		
1*03	7.62	5.08	1*23	58.42	55.88		
1*04	10.16	7.62	1*24	60.96	58.42		
1*05	12.70	10.16	1*25	63.50	60.96		
1*06	15.24	12.70	1*26	66.04	63.50		
1*07	17.78	15.24	1*27	68.58	66.04		
1*08	20.32	17.78	1*28	71.12	68.58		
1*09	22.86	20.32	1*29	73.66	71.12		
1*10	25.40	22.86	1*30	76.20	73.66		
1*11	27.94	25.40	1*31	78.74	76.20		
1*12	30.48	27.94	1*32	81.28	78.74		
1*13	33.02	30.48	1*33	83.82	81.28		
1*14	35.56	33.02	1*34	86.36	83.82		
1*15	38.10	35.56	1*35	88.90	86.36		
1*16	40.64	38.10	1*36	91.44	88.90		
1*17	43.18	40.64	1*37	93.98	91.44		
1*18	45.72	43.18	1*38	96.52	93.98		
1*19	48.26	45.72	1*39	99.06	96.52		
1*20	50.80	48.26	1*40	101.6	99.06		

B	CONTACT	1-40	BRASS	GOLD FLASH
A	HOUSING	1	PBT UL94V-0	BLACK
NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
UNLESS OTHERWISE SPECIFIED TOLERANCES				
3G ENTERPRISE LIMITED				
TITLE		PH2.54 1*40P	180D	PC3.0 L=10.6
DWN	JACK	PART NO.	2PH-1060-K口口	
CHKD		SCALE:N/A	UNIT: mm	
APVD		SIZE: A3	SHEET: 1 OF 1	REV: A
CUSTOMER COPY(YB)				

UnRegistered 注册商標 ksepontny 甲