

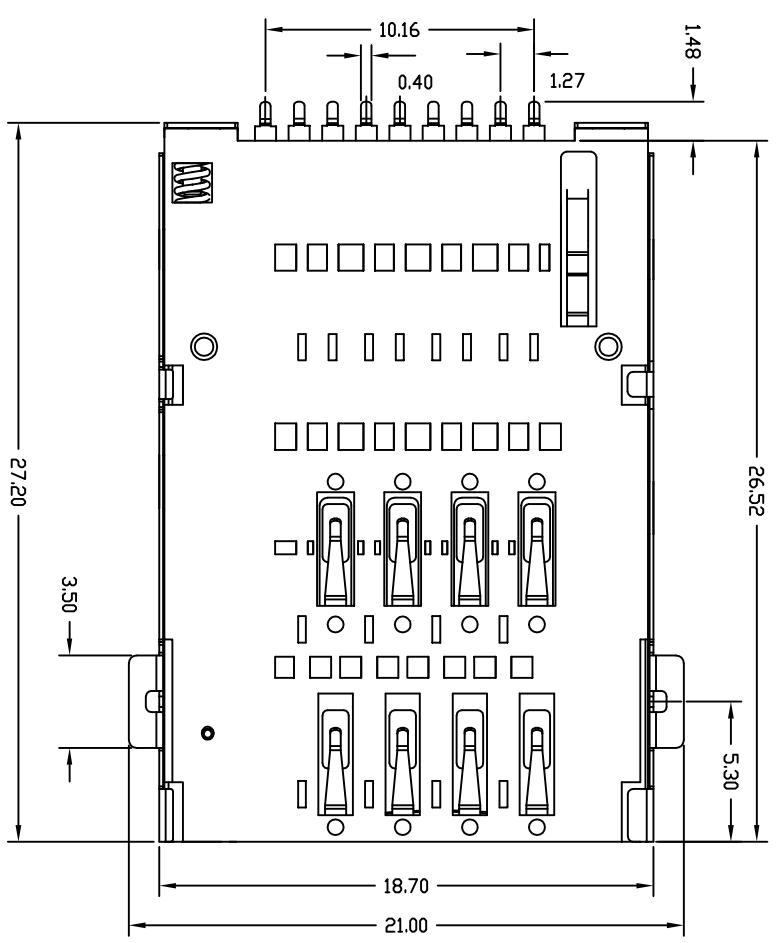

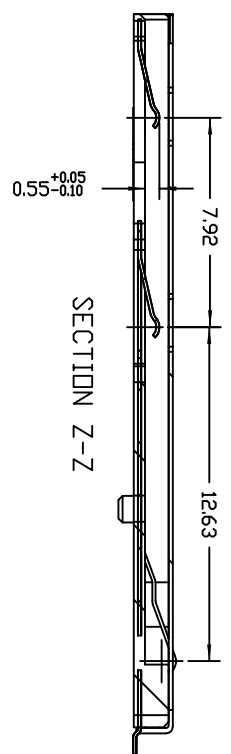
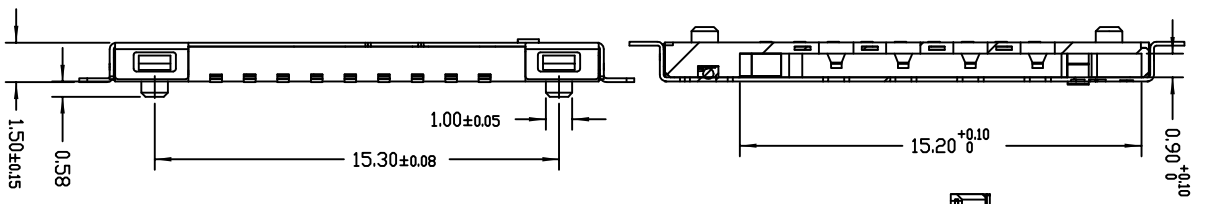
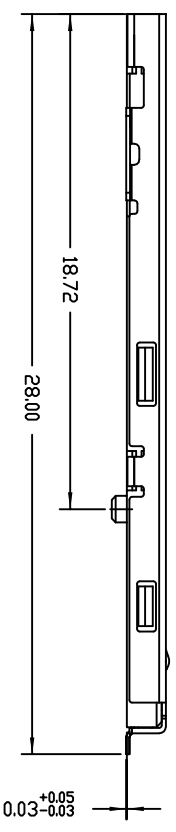
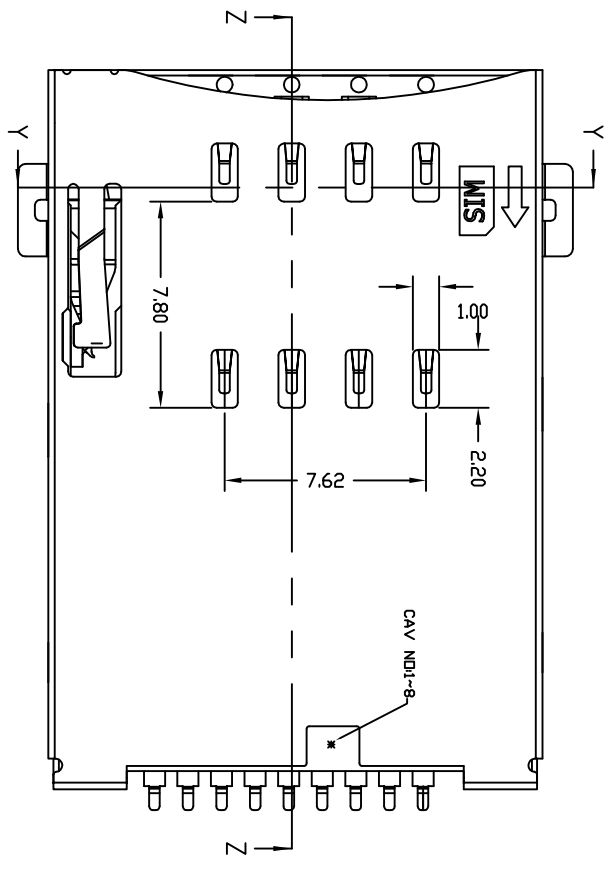

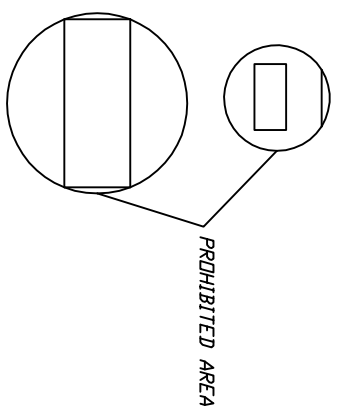
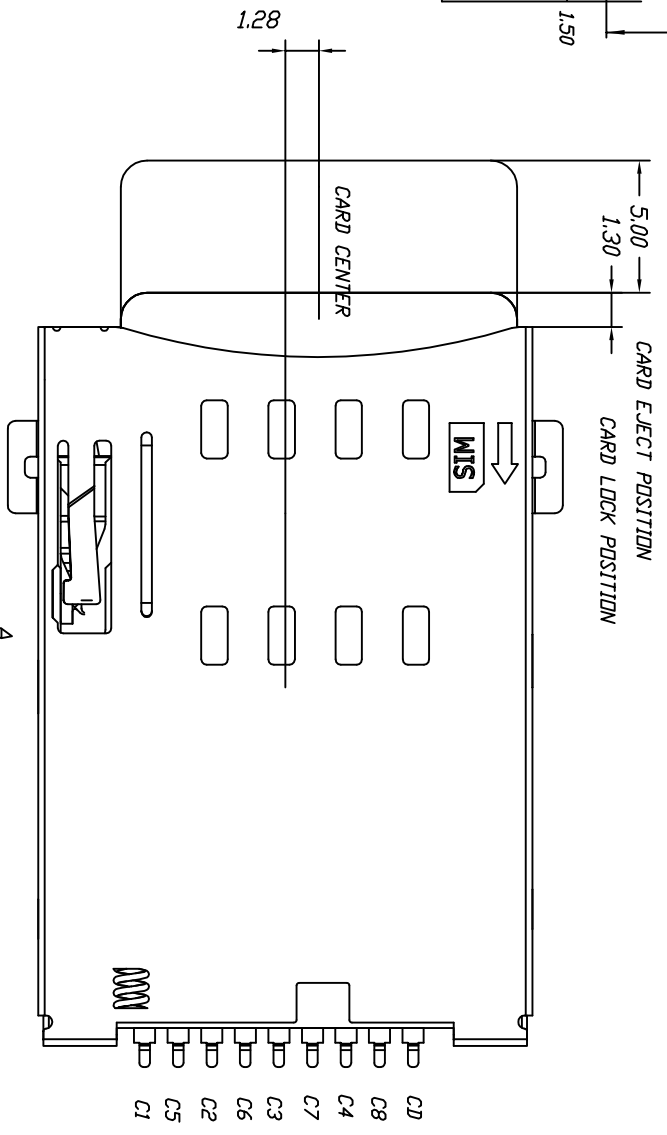


REV.	ECN NO.	MODIFY CONTENT	DATE
A		NEW	2011/12/31

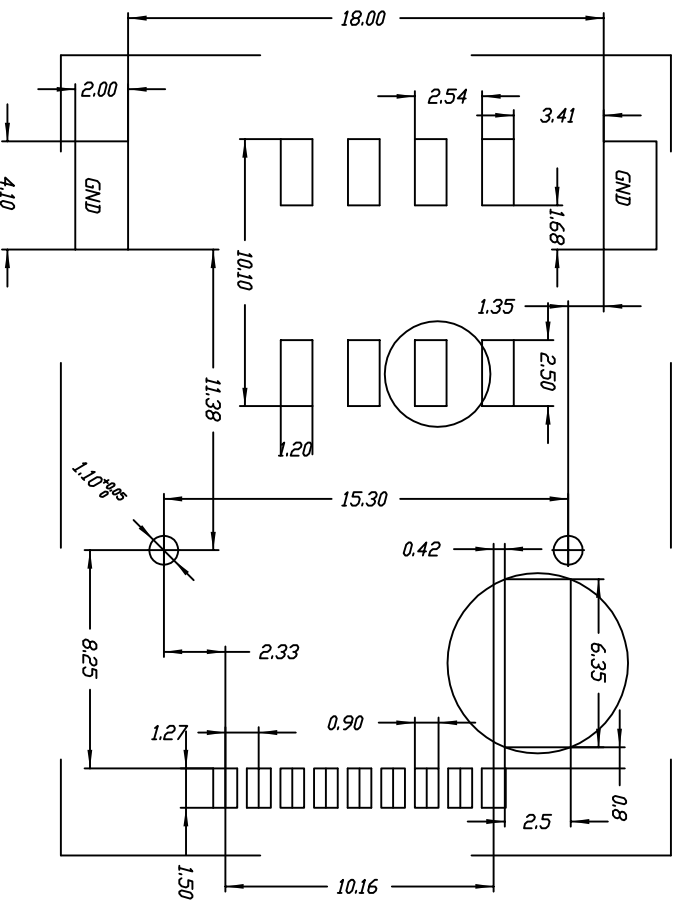

GENERAL TOLERANCE		DWG NO.	JYSA1018-001	APPD:	WIND	Scale
X:±0.25	X:±5'	Title	PUSH-PUSH SIM CARD T=1.5 CONN	CHKD:		1:1
X:±0.20	X:±2'	Part NO.	JYS-SIM150-078	DR:		mm
.XX±0.15	.XX±1'	Date	2012/12/31			
.XXX±0.08	.xxx±0.5'					
SHEET	1/2	杰宇森电子有限公司 JIE YU SEN ELECTRONIC CO., LTD.				

REV.	EGN.NO.	MODIFY/CONTENT	DATE
A		NEW	2011/12/31

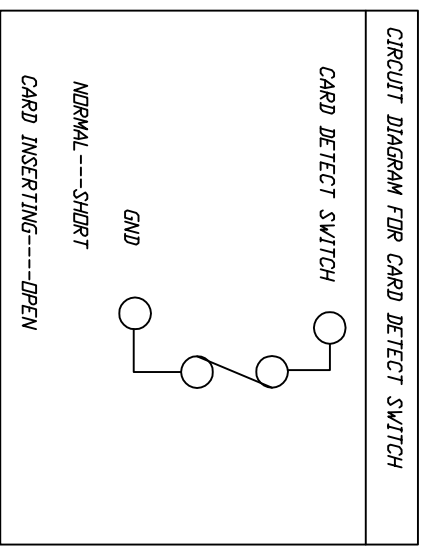

NOTE:

MATERIAL:

1>HOUSING/HART-CAM:HI-TEMP PLASTIC UL94V-0 BLACK.

2>TERMINAL: COPPER ALLOY.

3>SHELL/CAM PIN/SPRING: STAINLESS STEEL

FINISH:

TML: 1.25-6.25 MICRON NICKEL MIN UNDER-PLATED GOLD FLASH PLATD ON CONTACT AREA AND SOLDER TAIL.

SHELL: GOLD FLASH OVER NICKEL UNDER-PLATED ON SOLDER PAD

MECHANICAL SPEC:

1-> REPEATED 5000 TIMES MATING AND UNMATING CYCLES AND STILL MEAT ELECTRICAL CHARACTERISTICS.

ELECTRICAL SPEC:

1> RETIED CURRENT (PER CONTACT): 0.5AMPS MAX AND TEMPERATURE RISE SHOULD BE 30° MAX

2> INSULATION RESISTANCE: 100MEG OHMS MIN

3> DIELECTRIC WITHSTANDING VOLTAGE: 500VAC

4> CONTACT RESISTANCE: 100MILLIOHMS MAX

GENERAL TOLERANCE	DWG NO.	JYS A1018-001	APPD:	WMD	Scale	1:1
X:±0.25	X:±0.5		CHKD:		UNIT	mm
X±0.20	X'±2"	Title	DR:			
.XX±0.15	.XX'±1"	Part NO.	Date			
.XXX±0.08	.xxx'±0.5"	JYS-SIM150-078	2012/12/31			
SHEET	2/2					

JYS 杰宇森电子有限公司
JIE YU SEN ELECTRONIC CO., LTD.