

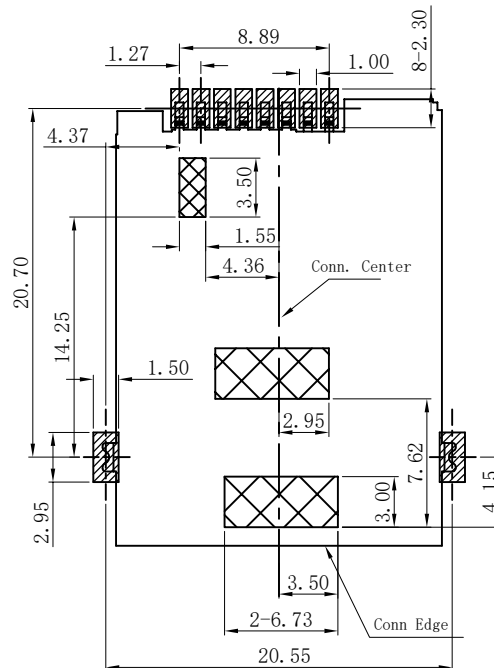


| REV. | ECN.NO. | MODIFY.CONTENT | DATE |
|------|---------|----------------|------------|
| AO | | NEW | 2017/10/28 |

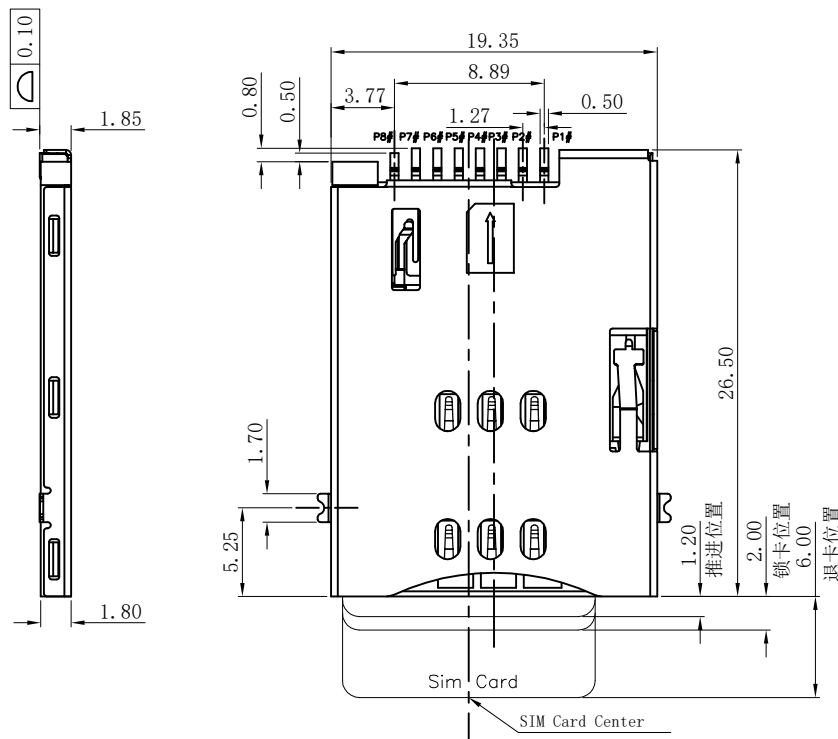

NOTES:


- 1) MATERIAL:
HOUSING: LCP, UL94V-0, COLOR: BLACK
CONTACT: COPPER ALLOY
SHELL: STAINLESS STEEL
- 2) PLATING :
CONTACT: GOLD FLASH PLATED ON CONTACT AREA; MATTE TIN PLATING ON SOLDER TAILS, WITH ENTIRE CONTACT UNDERPLATED 50u"Min. NICKEL
SWITCH PIN: GOLD FLASH PLATED ON CONTACT AREA; GOLD FLASH PLATING ON SOLDER TAILS, WITH ENTIRE CONTACT UNDERPLATED 50u"Min. NICKEL
SHELL: 50u"Min. NICKEL UNDERPLATED OVERALL, GOLD FLASH PLATED ON SOLDER TAILS
- 3) ELECTRICAL REQUIREMENTS:
CURRENT: 0.5A
VOLTAGE: 100V
CONTACT RESISTANCE: 100mΩ MAX
INSULATION RESISTANCE 100 MEGOHMS MIN
- 4) MECHANICAL
DURABILITY 3000 CYCLES

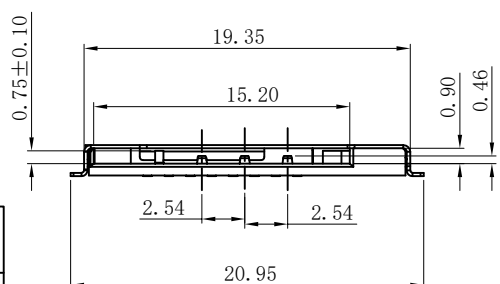

RECOMMENDED PCB LAYOUT


GENERAL TOLERANCE ±0.05

- PAD AREA
- FORBIDDEN AREA

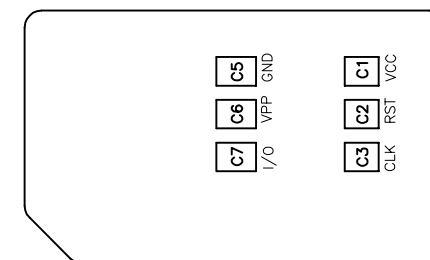

SIM 示意图
芯片面朝下视图


| PIN NO. | DESCRIPTION |
|---------|-------------|
| P1# | C1:VCC |
| P2# | C5:GND |
| P3# | C2:RST |
| P4# | C6:VPP |
| P5# | C3:CLK |
| P6# | C7:I/O |
| P7# | POL |
| P8#/SW | DET |

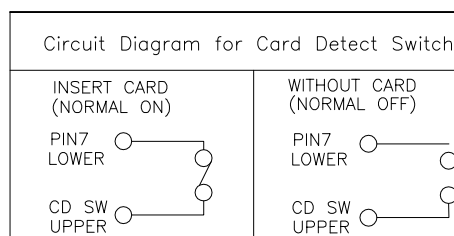

| | | | | | | | | |
|--|---------------------------|-------------------|------------|--------------|----|--------------------------------------|----|-----|
| Circuit Diagram for Card Detect Switch | | GENERAL TOLERANCE | 图号 | JYSA20171028 | 设计 | 朱全 | 比例 | 1:1 |
| INSERT CARD (NORMAL ON) | WITHOUT CARD (NORMAL OFF) | X.±0.45 | x.±5° | 品名 | 审核 | 核准 | 单位 | mm |
| | | .X±0.35 | .x'±2° | | | | | |
| | | .XX±0.25 | .xx'±1° | 料号 | 日期 | 2017/10/28 | | |
| | | .XXX±0.15 | .xxx'±0.5° | | | | | |
| | | SHEET | 1/2 | Shenzhen | | JYSCONN Electronics Co., LTD. | | |

| | | | |
|------|---------|----------------|------------|
| REV. | ECN.NO. | MODIFY.CONTENT | DATE |
| A0 | | 新机种图面发行 | 2017/10/28 |


<图一>

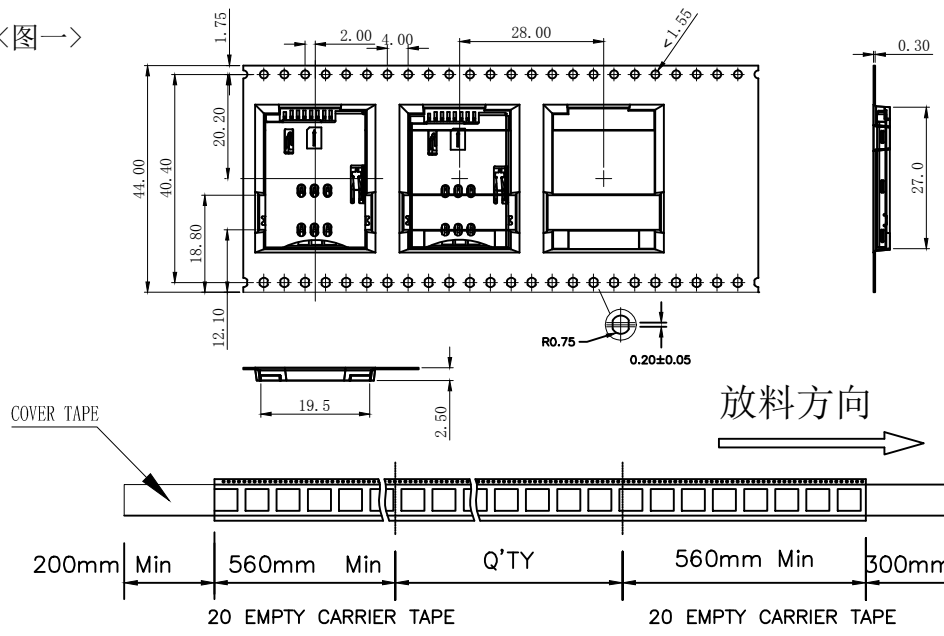


<TABLE 1> PACKAGING QUANTITY

| QTY/REEL | REEL/CARTON | QTY/CARTON |
|----------|-------------|------------|
| 550 | 6 | 3300 |

<图三>

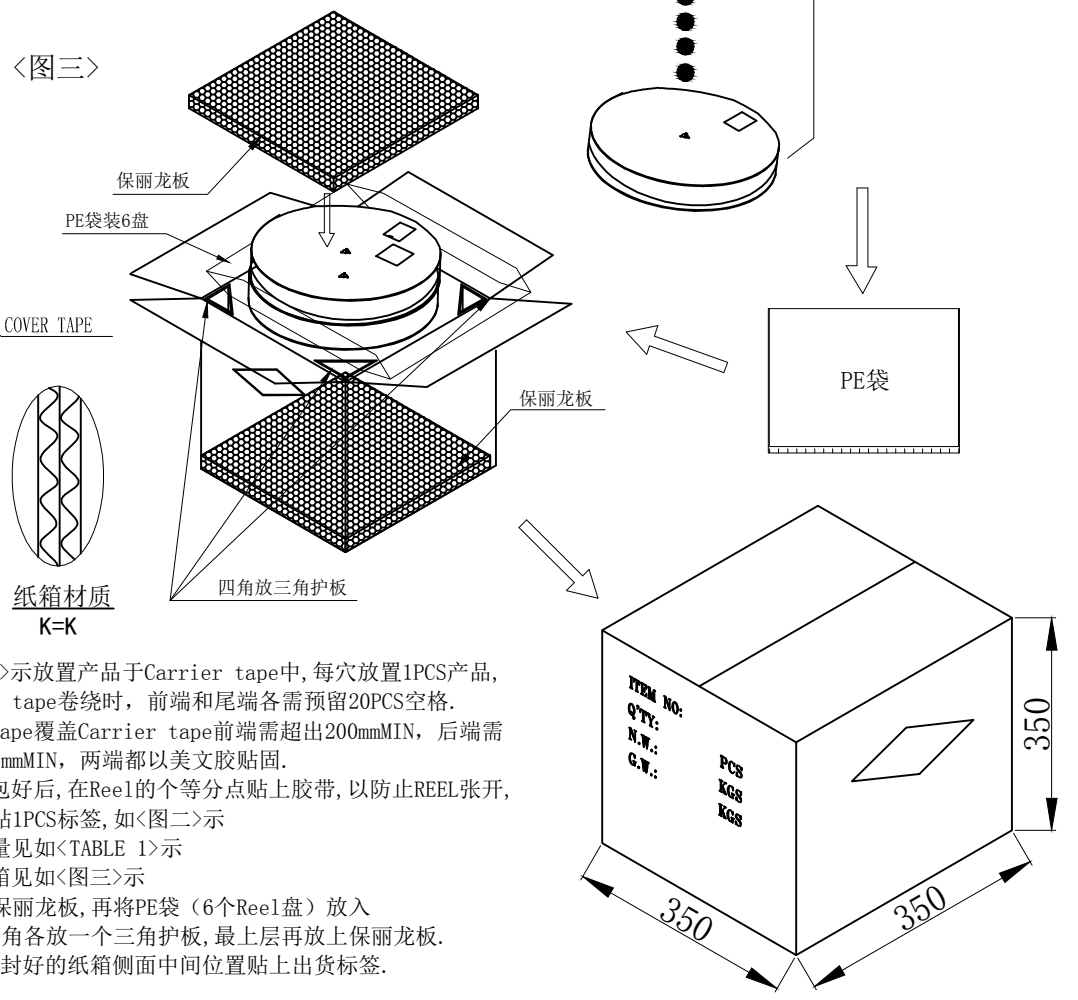

<图二>

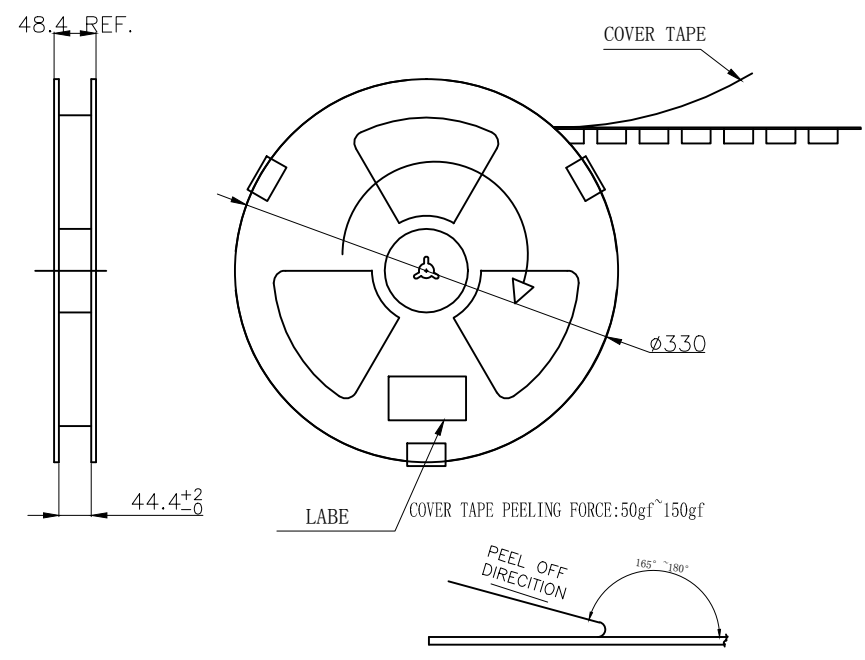

备注:

1. 依<图一>示放置产品于Carrier tape中, 每穴放置1PCS产品, Carrier tape卷绕时, 前端和尾端各需预留20PCS空格.
2. Cover tape覆盖Carrier tape前端需超出200mmMIN, 后端需留出300mmMIN, 两端都以美文胶贴固.
3. 包装机包好后, 在Reel的个等分点贴上胶带, 以防止REEL张开, 每Reel贴1PCS标签, 如<图二>示
4. 包装数量见如<TABLE 1>示
5. 包装成箱见如<图三>示
箱底放保丽龙板, 再将PE袋 (6个Reel盘) 放入箱内, 四角各放一个三角护板, 最上层再放上保丽龙板.
6. 封箱, 在封好的纸箱侧面中间位置贴上出货标签.

| GENERAL TOLERANCE | | 图号 | JYSA20171028 | 设计 | 朱全 | 比例 | 1:1 |
|-------------------|------------|--|------------------------------|----|------------|----|-----|
| X.±0.45 | x.±5' | 品名 | SIM CARD PUSH(6+2PIN) 包装图 | 审核 | | 单位 | mm |
| .X±0.35 | .x'±2' | | | 核准 | | 视角 | ☉ |
| .XX±0.25 | .xx'±1' | 料号 | JYS-SIM180-047 | 日期 | 2017/10/28 | 版本 | A0 |
| .XXX±0.15 | .xxx'±0.5' | JYSCONN Electronics Co., LTD. | | | | | |
| 页号 | 2/2 | | | | | | |