

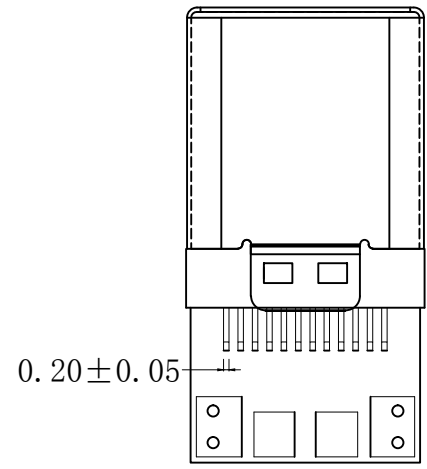
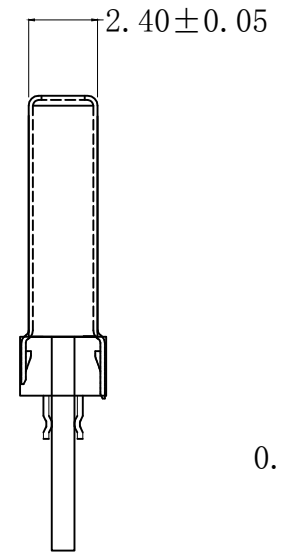


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2020/05/25

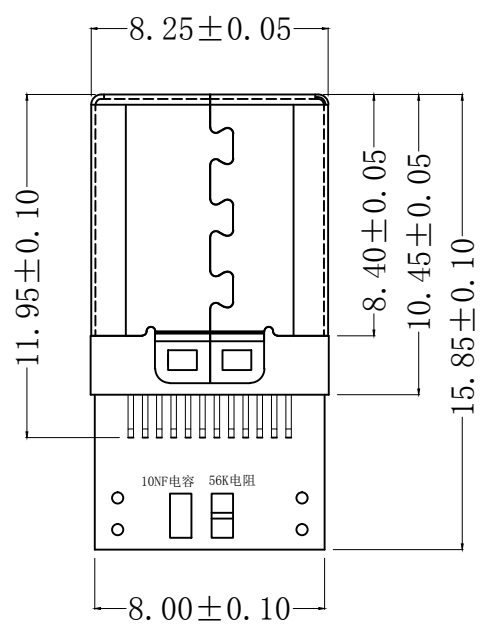

电器特性: (Electrical characteristics)

- 最大值30毫欧: (30 milliohms MAX)
- 2. 耐电压: (Dielectric Withstanding Voltage:)
- 3. 绝缘阻抗: (Insulation Resistance:)
- 最小值1000兆欧姆 (1000 mega-ohms MIN)
- 机械性能: (Mechanical:)
- 最大20N (20N MAX)

- 8-20N, 5000次后6-20N
- 材料: Material:
- 1. 塑胶: (Housing) :High Temperature Inertplastics, □ LCP 黑胶
- 2. 端子: (Contact): □ C5191
- 3. 外壳: (Shell) : □ SUS201
- 电镀: (Finish):
- 1. 端子: (Contact): Plated Gold in Mating Area: Tin On Solder Tails □ 接触点镀金1u, 脚镀锡
- 2. 外壳: (Shell): Nickel Plating 镀亮镍

- 注明: 1. 标示 "☆" 为IPQC 重点检测尺寸.  
 2. 产品不能有压伤变形、模痕。  
 3. 产品毛边0.03mmMax.

GENERAL TOLERANCE		DWG NO.	JYSA0413-02	APPD:	WIND	Scale	1:1
X.±0.45	x.'±5'	Title	TYPE C 焊板充电4芯缩口	CHKD:		UNIT	mm
.X±0.35	.x'±2'			DR:			
.XX±0.25	.xx'±1'	Part NO.	JYS-USB105-081	Date	2020/05/25		
.XXX±0.15	.xxx'±0.5'						
SHEET	1/1	<b>JYSCONN</b> Shenzhen JYSCONN Electronics Co., LTD.					