
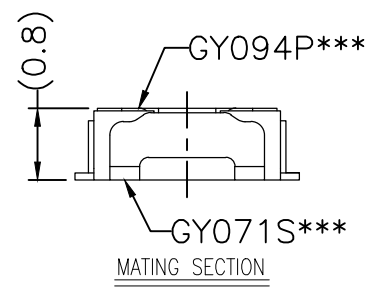
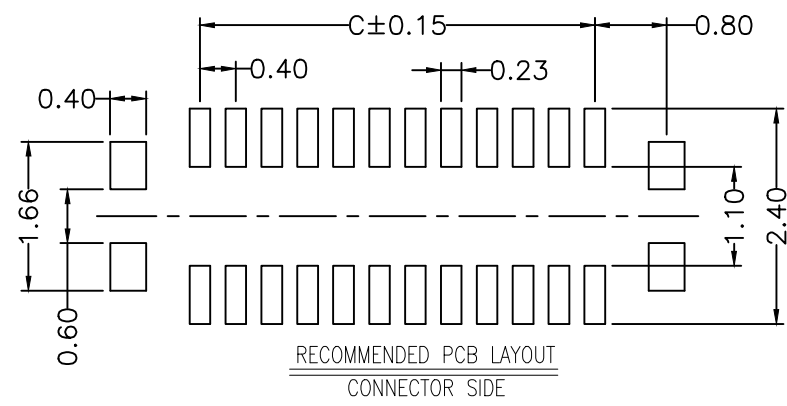

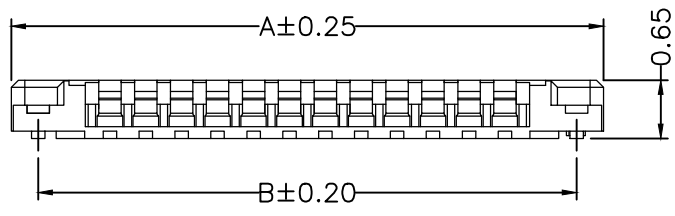


REV.	ECN.NO.	MODIFY.CONTENT	DATE
A		NEW	2018/02/29

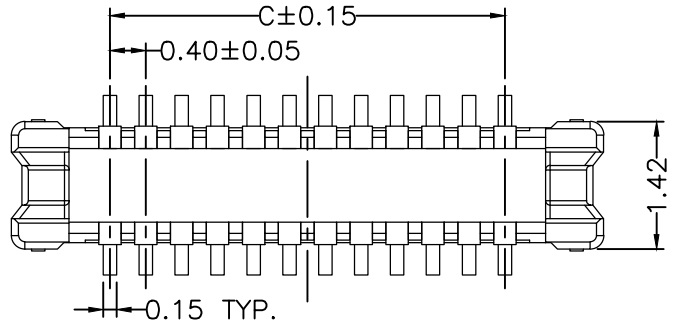

SPECIFICATIONS:

- 1.VOLTAGE/CURRENT RATING: 30V/0.3A AC;
- 2.WITHSTANDING VOLTAGE: 100V AC ONE MINUTE;
- 3.INSULATION RESISTANCE: 50MΩ MIN;
- 4.CONTACT RESISTANCE: 100mΩ MAX;
- 5.OPERATING TEMPERATURE RANGE: -35° C TO 85° C.

MATERIAL:

- 1.INSULATOR: LCP UL 94V-0 BLACK;
- 2.TERMINAL: COPPER ALLOY;
- 3.METAL FITTINGS: COPPER ALLOY.

PLATING:

- 1.TERMINAL: GOLD PLATING,  
NICKEL 50u" MIN. OVER ALL;
- 2.METAL FITTINGS: TIN 100u" MIN. OVER NICKEL 50u"MIN.

PIN NO.	A	B	C
10	3.80	3.20	1.60
12	4.20	3.60	2.00
14	4.60	4.00	2.40
16	5.00	4.40	2.80
20	5.80	5.20	3.60
24	6.60	6.00	4.40
30	7.80	7.20	5.60
34	8.60	8.00	6.40
40	9.80	9.20	7.60
50	11.80	11.20	9.60

GENERAL TOLERANCE		DWG NO.	JYSA0312-001	APPD:	WIND	Scale	1:1
X.±0.45	x.'±5'	Title	BTB 0.4PH HAEDER 0.8H 公座	CHKD:		UNIT	mm
.X±0.35	.x'±2'			DR:			
.XX±0.25	.xx'±1'	Part NO.	JYS-BM0408-OXX	Date	2018/02/29		
.XXX±0.15	.xxx'±0.5'						
SHEET	1/1					<b>JYSCONN Shenzhen</b> <b>JYSCONN Electronics Co., LTD.</b>	